



REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE

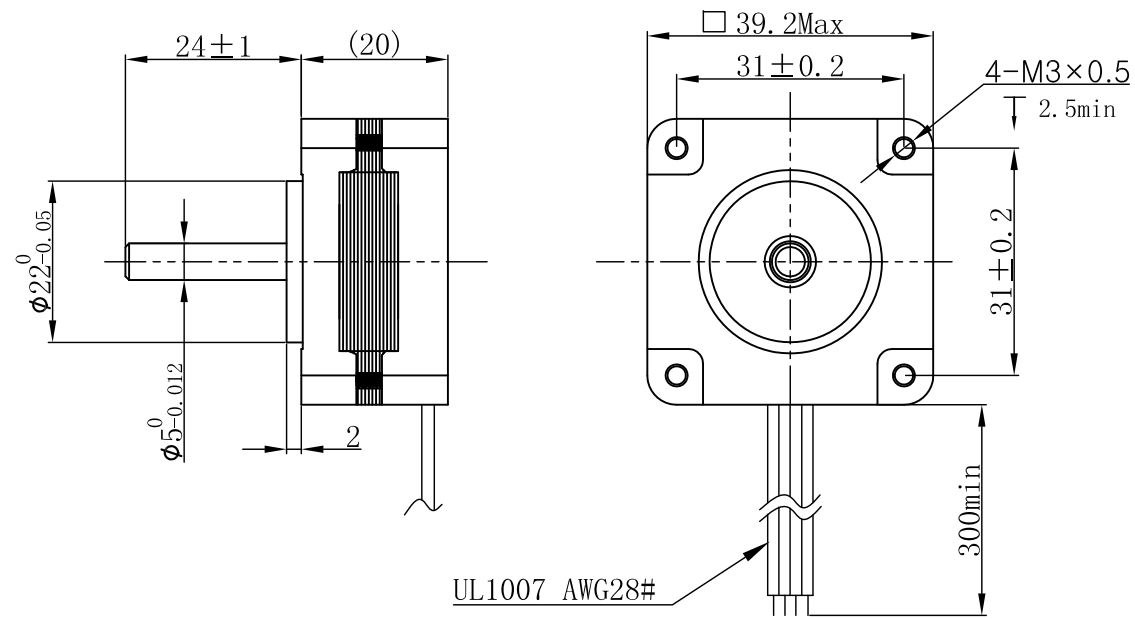

Wiring Diagram(接线图)



Exciting Sequence (励磁顺序)


CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW, see from flange side
(顺时针, 从法兰侧看)

SPECIFICATION

STEP ANGLE	步距角	1.8°/full step (整步)
STEP ANGLE ACCURACY	步距角精度	±5%
NUMBER OF PHASE	绕组相数	2
RATED VOLTAGE	额定电压	2.64 VDC
RATED CURRENT	额定电流	0.4 A
RESISTANCE/PHASE	每相电阻	6.6±10% ohms@20°C
INDUCTANCE/PHASE	每相电感	7.0±20% mH@1kHz
HOLDING TORQUE	保持转矩	8.5 N.cm
PULL OUT TORQUE	运行转矩	N.cm@ RPM
BACK EMF	反电动势	V @300RPM
DETENT TORQUE	定位转矩	N.cm
ROTOR INERTIA	转子转动惯量	11.0 g.cm ²
WEIGHT	重量	0.12Kg

PERMISSIBLE RADIAL+AXIAL FORCE
(允许的轴向和径向力)



TEMPERATURE RISE	温升	Less than 80K (≠80度)	AXIAL-FORCE 轴向压力	Fa=10 N Max.
SOURCE VOLTAGE	驱动器电压	24 VDC	DISTANCE 距离	a=10 mm
INSULATION CLASS	绝缘等级	B 130°C	RADIAL-FORCE 径向压力	Fr=28 N Max.
DIELECTRIC STRENGTH	介电强度	500VAC 1MIN	SHAFT RADIAL PLAY 径向间隙	0.02mm Max. @4N
INSULATION RESISTANCE	绝缘电阻	100MΩ @500VDC	SHAFT AXIAL PLAY 轴向间隙	0.08mm Max. @4N
IP CODE	防护等级	IP30		
OPERATION AMBIENT	使用环境	Ambient temperature: -20...+50°C, humidity Max. 85%(No condensation)		
STORAGE AMBIENT	存储环境	Ambient temperature: -20...+85°C, humidity Max. 85%(No condensation)		

DESIGN	DATE	P/N.	3.1.01.039.0098
TITLE	Specifications		
USED ON	FL39STH20-0404A		
DWG NO.		REV	
UNLESS OTHERWISE SPECIFIED TOLERANCES	MATERIAL	CONTR.	CHECK
DECIMALS: .x ±0.5			
ANGULAR: .xx ±0.25 ±0°30'			
.xxx ±0.1			
UNIT: mm	FIRST ANGLE PROJECTION	SCALE	NTS
DO NOT SCALE DRAWING		SHEET	OF
		FULLING MOTOR	